

LED DOWNLIGHT

CAMUS PRO 12W-IP44-4000K-WHITE

TR02124410B

INDOOR > Downlight (100 to 240 mm)

Round white aluminum downlight. Very thin and with wide light distribution, it is ideal for tertiary applications. Dali Push-Dim option with suitable driver



Application domain

- Circulations areas
- Cloakrooms
- Washrooms
- Shop



Electric data

Total power (W)	12
Rated voltage (V)	24Vdc
Distorsion harmonique	-
Power factor	>0,95
Network frequencies	-
Electric class	III
Dimmable	No



FILE UPDATED ON 29/11/2022

Photometric data

Color temperatures	4000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	1200lm (4000K)
ULOR	-

Technical data

Recessed diameter (mm)	Min. : 125 Max. : 130
Weight (kg)	0.22
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	White
IK Code	IK07
Incandescent wire test	650°C
IP Code	IP44 facade
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PS
Driver included	Yes
Recoverable	Isolant rouleau



FILE UPDATED ON 29/11/2022




Liefe time

L70 à 25°	50 000 h
-----------	----------

Supplementary data

Warranty period	3 years
Light beam spread	110°
Tiltable	No
Connection type	Bornier avec repiquage
Linked products	<ul style="list-style-type: none">• PL09002001B - DALI PUSH POWER SUPPLY Camus

Other

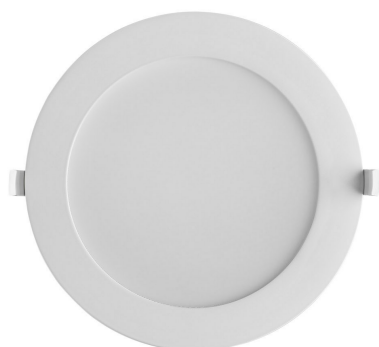

FILE UPDATED ON 29/11/2022

