

LED PANEL

PANEL CONFORT UGR 16-600x600-24W- IP20-4000K-WHITE

BL04242005

INDOOR > Office Recessed Fixture

600X600 UGR<16 panel, chrome optics. Low consumption and very good visual comfort! EEC eligible. Ideal for rooms with demanding or intense visual work. 140lm/W, interchangeable LED modules to optimize recycling. Dalí option.



Application domain

- Meeting room
- School
- Office



24 W

3480
lm

UGR
<16

IRC
>80

IP20

4000K



Electric data

Total power (W)	24
Rated voltage (V)	230V
Distorsion harmonique	<9%
Power factor	>0.95
Network frequencies	50Hz , 60Hz
Electric class	II
Dimmable	No

Power supply data

Max. lamp per B10A circuit breaker	10
Max. lamp per B16A circuit breaker	15
Max. lamp per C16A circuit breaker	20

Photometric data

Color temperatures	4000K
UGR	<16
Light source type	SMD
Including the light source	Yes
SDCM	SDCM<3
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	3480lm (4000K)
ULOR	-

Technical data

Dimensions (mm)	595 x 595 x 26
Weight (kg)	2.82
Recessed depth under BA13 (mm)	40
Cable length	0
Product color	White
IK Code	IK06
Incandescent wire test	650°C
IP Code	IP20
Use temperature range	-20... +45°
Body material	Aluminium - PC
Diffuser material	PC
Driver included	Yes
Recoverable	Insulation material except driver

Liefe time

L80B10 à 25°	50 000 h
--------------	----------


Supplementary data

Warranty period	5 years
Light beam spread	85°
Tiltable	No
Connection type	Bornier avec repiquage


Light distribution

LUMINANCE MOYENNE	LUMINANCE MAX	DIAMÈTRE	
884 lx	1727 lx	Ø 1,08 m	1 m
221 lx	431 lx	Ø 3,06 m	2 m
98 lx	191 lx	Ø 5,94 m	3 m
35 lx	69 lx	Ø 9,9 m	5 m

Luminance (lx) - Diamètre du cône (Ø cm) - Distance (m)



Atmosphere

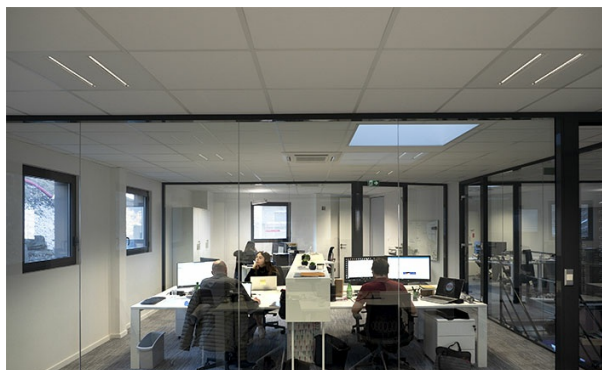

Other

