

LED PANEL

PANEL V CHANTIER UGR19 PRISM DALI PUSH DIM X6 30W 4000K 3600lm

BL04302006

INDOOR > Office Recessed Fixture

LED panels packed by 6 in site kit. Save time, money and contribute to the environment. Dali and Push Dim version with prismatic diffuser. LED panels packed by 6 in site kit. Save time, money and contribute to the environment. Dali and Push Dim version with prismatic diffuser.



Application domain

- Meeting room
- School
- Office
- Medical areas



30 W

3400
lmUGR
<19IRC
>85

IP20

4000K



FILE UPDATED ON 08/02/2023

Electric data

Total power (W)	30
Rated voltage (V)	230V
Distorsion harmonique	<6%
Power factor	>0.95
Network frequencies	50Hz , 60Hz
Electric class	II
Dimmable	Dali , push dim

Photometric data

Color temperatures	4000K
UGR	<19
Light source type	-
SDCM	SDCM>4
IRC	>85
Safety group (EN62778)	RG0
Luminous flux (lm)	3400lm (4000K)
ULOR	-



FILE UPDATED ON 08/02/2023



Technical data

Dimensions (mm)	595 x 595 x 30
Weight (kg)	1.92
Recessed depth under BA13 (mm)	-
Cable length	20 cm
Product color	White
IK Code	IK04
Incandescent wire test	650°C
IP Code	IP20
Use temperature range	-20... +45°
Body material	Iron
Diffuser material	PS
Driver included	Yes
Recoverable	Insulation material except driver

Liefe time

L80 à 25°	50 000 h
-----------	----------


Supplementary data

Warranty period	5 years
Light beam spread	90°
Tiltable	No
Connection type	fast connector
Linked products	<ul style="list-style-type: none">• BL08000013 - TF066-Protrusion frame 600x600• BL08000002 - TF018 Mechanically welded projection frame• BL08000009 - INTEGRATION FRAME 600x600



FILE UPDATED ON 08/02/2023



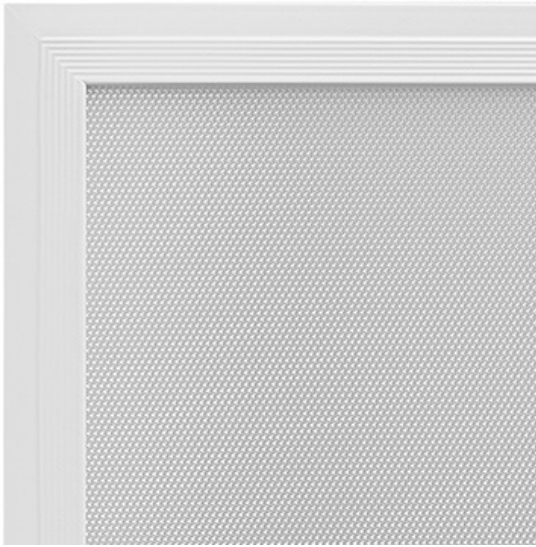

FILE UPDATED ON 08/02/2023