

LED PANEL

# TF110-PANEL ECO UGR19-DALI PUSH DIM- PRISM-600X600-30W-4000K

BL04302002

**INDOOR** > Office Recessed Fixture

Led panel UGR<19 with prismatic diffuser, with safety rope,  
PMMA lens and DALI Push Dim power supply.



## Application domain

- Meeting room
- School
- Office



30 W

3400  
lmUGR  
<19IRC  
>85

IP40

4000K



## Electric data

Total power (W)	30
Rated voltage (V)	230V
Distorsion harmonique	<6%
Power factor	>0.95
Network frequencies	50Hz , 60Hz
Electric class	II
Dimmable	Dali , push dim

## Photometric data

Color temperatures	4000K
UGR	<19
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>85
Safety group (EN62778)	RG0
Luminous flux (lm)	3400lm (4000K)
ULOR	-

## Technical data

Dimensions (mm)	595 x 595 x 30
Recessed diameter (mm)	Min. : 600   Max. : 600
Weight (kg)	2.26
Recessed depth under BA13 (mm)	20
Cable length	20 cm
Product color	White
IK Code	IK04
Incandescent wire test	650°C
IP Code	IP40
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes


## Liefe time

L80 à 25°	50 000 h
-----------	----------


## Supplementary data

Warranty period	5 years
Light beam spread	90°
Tiltable	No
Connection type	fast connector
Linked products	<ul style="list-style-type: none"><li>• BL08000013 - TF066-Protrusion frame 600x600</li><li>• BL08000002 - TF018 Mechanically welded projection frame</li><li>• BL08000009 - INTEGRATION FRAME 600x600</li></ul>

## Light distribution

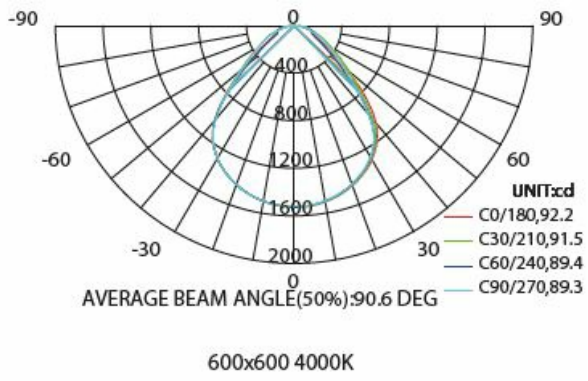

## Photometric curves

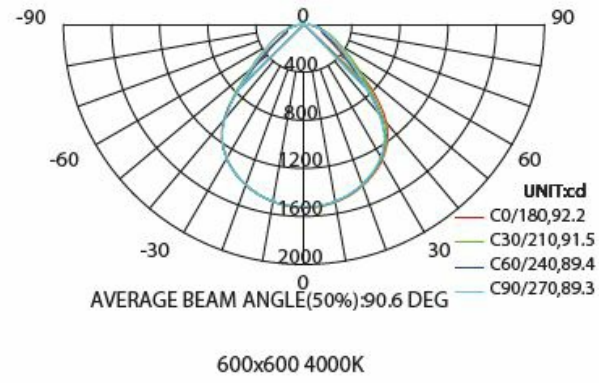

## Other

