

3ALL PROJECTOR

RAFALE 3 ALL-7W-3CCT-IP20-WHITE-DIMM

TR07072002

INDOOR > Tracklights

Track-mounted LED spotlight with color temperature change. Aluminum body. Ideal for general or accent lighting. Naturally anti-glare does not require a honeycomb grid.



Application domain

- Shop



Electric data

| | |
|-----------------------|-------------|
| Total power (W) | 7 |
| Rated voltage (V) | 230V |
| Distorsion harmonique | - |
| Power factor | >0.9 |
| Network frequencies | 50Hz , 60Hz |
| Electric class | I |
| Dimmable | Triac |

Photometric data

| | |
|----------------------------|-----------------------|
| Color temperatures | 3000K / 4000K / 5000K |
| UGR | <19 |
| Light source type | COB |
| Including the light source | Yes |
| SDCM | SDCM>4 |
| IRC | >80 |
| Safety group (EN62778) | RG1 |
| Luminous flux (lm) | 650lm (4000K) |
| ULOR | - |

Technical data


| | |
|--------------------------------|---------------|
| Dimensions (mm) | 124 x 50 x 50 |
| Weight (kg) | 0.38 |
| Recessed depth under BA13 (mm) | - |
| Cable length | - |
| Product color | White |
| IK Code | IK08 |
| Incandescent wire test | 650°C |
| IP Code | IP20 |
| Use temperature range | -20... +40° |
| Body material | Aluminium |
| Diffuser material | PC |
| Driver included | Yes |
| Recoverable | Non concerné |

Liefe time

| | |
|-----------|----------|
| L70 à 25° | 50 000 h |
|-----------|----------|

Supplementary data

| | |
|-------------------|---|
| Warranty period | 3 years |
| Light beam spread | 38° |
| Tiltable | Yes (350°) |
| Connection type | Adaptor 4 wires track light |
| Linked products | <ul style="list-style-type: none">• TR07070002 - BURST CCT WHITE SHUTTER 7W |

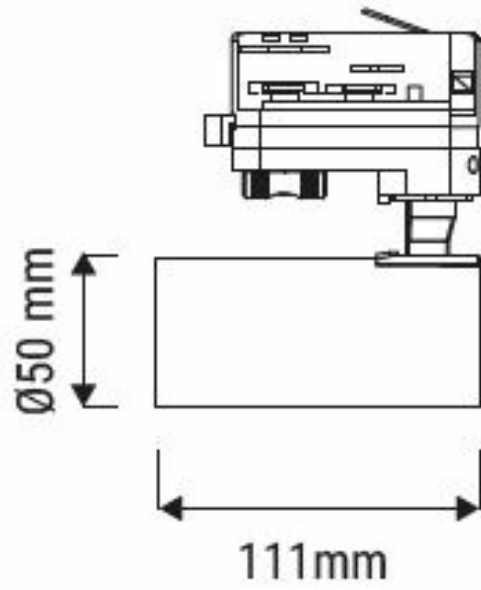

Atmosphere

