


OUTDOOR WALL

NESTOR-10W-IP65-3000K

BL16106502

OUTDOOR > Outdoor Wall Light

Exterior residential wall sconce, uplight or downlight. Architectural functional lighting. Sober and timeless design.



Application domain

- Outdoor residential
- Garden
- Outdoor Circulations
- Outdoor lighting



Electric data

Total power (W)	10
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.9
Network frequencies	50Hz
Electric class	I
Dimmable	No



FILE UPDATED ON 01/02/2023

Photometric data

Color temperatures	3000K
UGR	<19
Light source type	COB
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG1
Luminous flux (lm)	800lm (3000K)
ULOR	-

Technical data

Dimensions (mm)	120 x 120 x 120
Weight (kg)	1.24
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	Dark gray
IK Code	IK10
Incandescent wire test	850°C
IP Code	IP65
Use temperature range	-25... +45°
Body material	Aluminium
Diffuser material	Verre trempé
Driver included	Yes
Recoverable	Non concerné



FILE UPDATED ON 01/02/2023

Liefe time


L70 à 25°	50 000 h
-----------	----------

Supplementary data

Warranty period	3 years
Light beam spread	115°
Tiltable	No
Connection type	Connector on the product
Linked products	<ul style="list-style-type: none">• BL16106501 - ORIENT 180-10W-IP54-3000K• BL16206501 - HORIZON 2 -2x6.5W-IP65-3K• BL16206503 - HORIZON 1-10W-IP65-3K• BL05102002 - BIM APP 10W-3K-U&D-IP65-G• BL05102001 - BIM APP 10W-3K-U&D-IP65-B



Plan

Atmosphere

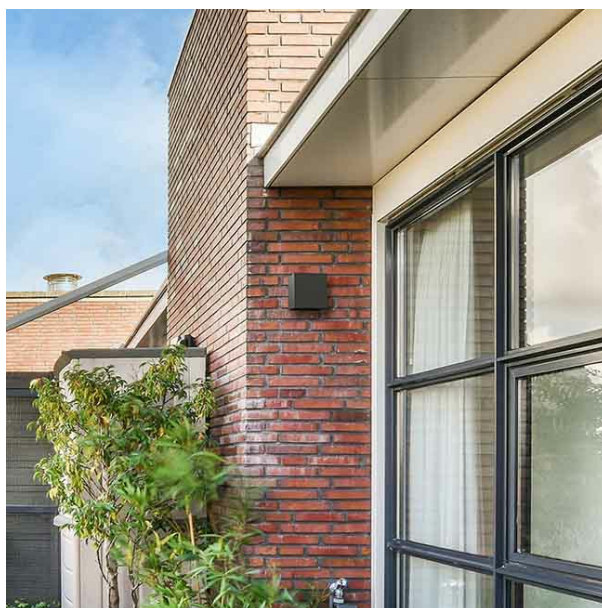

FILE UPDATED ON 01/02/2023



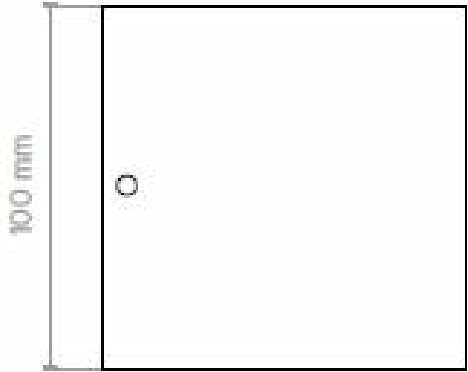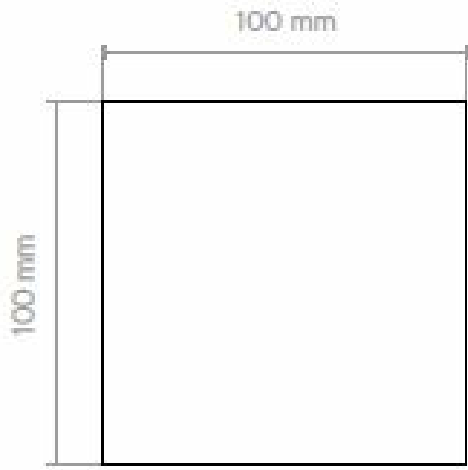

FILE UPDATED ON 01/02/2023



FILE UPDATED ON 01/02/2023