

TF113-ETANCHE EASY 120-40W-4000K TRAVERSANT

BL11406503

INDOOR > Triproof

Waterproof Led strip, through-hole, IP65, IK08, tool-free quick connection terminal blocks, 850°. Driver Osram



Application domain

- Industrial facilities
- Parkings lots and underground passages
- Garages
- Production areas, assembly plant
- Storage



36 W

4800
lmIRC
>80

IP65

4000K

D



FILE UPDATED ON 21/11/2022

Electric data

Total power (W)	36
Rated voltage (V)	230V
Distorsion harmonique	<17%
Power factor	>0.9
Network frequencies	50Hz
Electric class	I
Dimmable	No

Power supply data

Max. lamp per B10A circuit breaker	15
Max. lamp per B16A circuit breaker	20
Max. lamp per C16A circuit breaker	30

Photometric data

Color temperatures	4000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	4800lm (4000K)
ULOR	-



FILE UPDATED ON 21/11/2022



Technical data

Dimensions (mm)	1230 x 58 x 57
Weight (kg)	0.86
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	Grey
IK Code	IK08
Incandescent wire test	850°C
IP Code	IP65
Use temperature range	-20... +50°
Body material	PC
Diffuser material	PC
Driver included	Yes

Liefe time

L80 à 25°	50 000 h
-----------	----------

Supplementary data


Warranty period	5 years
Light beam spread	120°
Tiltable	No
Connection type	Connecteur rapide avec repiquage



FILE UPDATED ON 21/11/2022



Photometric curves

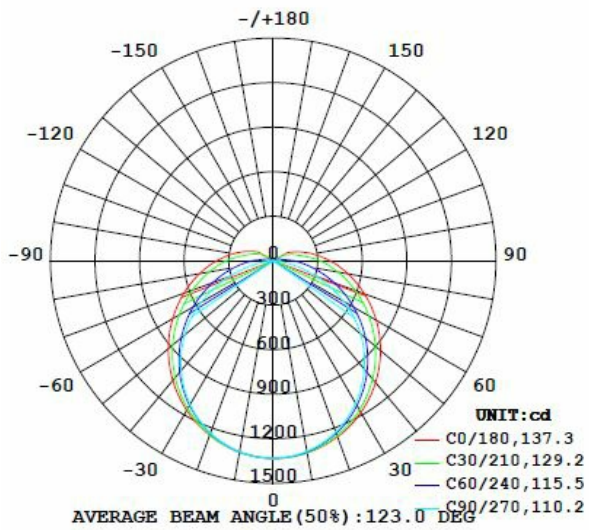

Accessories



FILE UPDATED ON 21/11/2022

