

# DRIVER RF-200W-4CH-24V

BL092002412

[LED STRIP](#) > LED Strip

[DRIVERS AND ACCESSORIES](#) > Alimentation et Accessoires

4 CH 24VDC 200W PUSH DIM RF power supply for RGB+W or single color. 8.4 A on 4 channels (4.1A max per channel)



## Electric data

Total power (W)	200
Rated voltage (V)	230V
Distorsion harmonique	<15%
Power factor	>0.95
Network frequencies	50Hz , 60Hz
Electric class	I
Dimmable	push dim , yes with RF remote controller

## Photometric data

Color temperatures	-
Light source type	-
SDCM	-
IRC	-
Safety group (EN62778)	-
Luminous flux (lm)	-
ULOR	-

## Technical data

Dimensions (mm)	330 x 79 x 39
Weight (kg)	0.92
Recessed depth under BA13 (mm)	-
Cable length	0
Product color	Brushed aluminium
IK Code	IK04
Incandescent wire test	-
IP Code	IP20
Use temperature range	-20... +45°
Body material	PC
Diffuser material	-
Driver included	No
Recoverable	Non recouvrable


## Liefe time

## Supplementary data

Warranty period	5 years
Light beam spread	
Tiltable	No
Connection type	Connector on the product


### Other

1. Connect with RGBW LED lighting

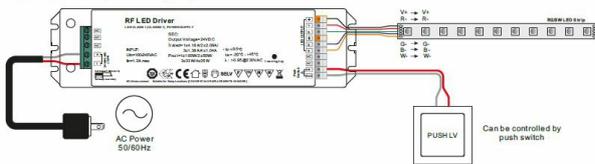

### Other

3. Connect with single color LED lighting

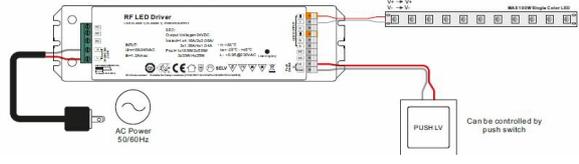

### Other

2. Connect with CCT LED lighting

