

DRIVER TRIAC-DALI-0-10V-PUSH-24V-100W

BL091002408

[WORKSITE](#) > LED strip

[DRIVERS AND ACCESSORIES](#) > Alimentation et Accessoires

24Vdc converter for led strip. Dali protocol, dimming in push dim, 1-10V or Triac. Ideal for triac spot assembly with led tape.



Electric data

| | |
|-----------------------|---------------------------------|
| Total power (W) | 100 |
| Rated voltage (V) | 230V |
| Distorsion harmonique | <15% |
| Power factor | >0.95 |
| Network frequencies | 50Hz , 60Hz |
| Electric class | I |
| Dimmable | Triac , Dali , push dim , 1-10V |

Photometric data

| | |
|------------------------|---|
| Color temperatures | - |
| Light source type | - |
| SDCM | - |
| IRC | - |
| Safety group (EN62778) | - |
| Luminous flux (lm) | - |
| ULOR | - |

Technical data


| | |
|--------------------------------|-----------------|
| Dimensions (mm) | 240 x 70 x 36 |
| Weight (kg) | 0.88 |
| Recessed depth under BA13 (mm) | - |
| Cable length | 0 |
| Product color | Grey |
| IK Code | IK04 |
| Incandescent wire test | - |
| IP Code | IP20 |
| Use temperature range | -25... +45° |
| Body material | - |
| Diffuser material | - |
| Driver included | No |
| Recoverable | Non recouvrable |

Liefe time


Supplementary data

| | |
|-------------------|--------------------------|
| Warranty period | 5 years |
| Light beam spread | |
| Tiltable | No |
| Connection type | Connector on the product |

Plan

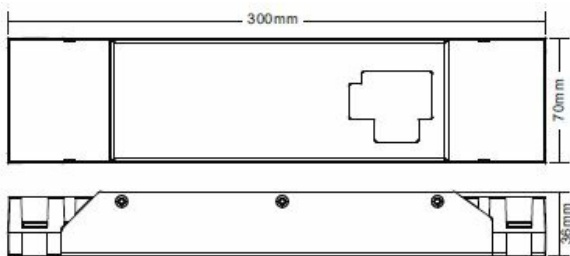

Other

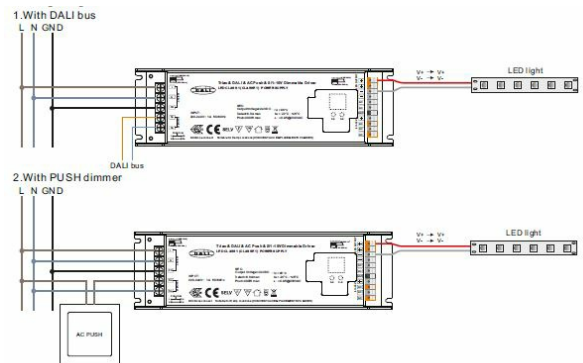

Other

