

LED PANEL

TF107-PANEL ECO UGR19-PRISM-600X600- 30W-3000K BACKLITE repiquable

BL04302004

INDOOR > Office Recessed Fixture

Led panel UGR<19 with prismatic diffuser, with safety rope and connection terminal block that can be transplanted without tools, PMMA lens.



Application domain

- Meeting room
- School
- Office



30 W

3300
lmUGR
<19IRC
>80

IP20

3000K



FILE UPDATED ON 26/01/2023

Electric data

Total power (W)	30
Rated voltage (V)	230V
Distorsion harmonique	<6%
Power factor	>0.95
Network frequencies	50Hz , 60Hz
Electric class	II
Dimmable	No

Power supply data

Max. lamp per B10A circuit breaker	10
Max. lamp per B16A circuit breaker	15
Max. lamp per C16A circuit breaker	25

Photometric data

Color temperatures	3000K
UGR	<19
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	3300lm (3000K)
ULOR	-



FILE UPDATED ON 26/01/2023



Technical data

Dimensions (mm)	595 x 595 x 34
Recessed diameter (mm)	Min. : 600 Max. : 600
Weight (kg)	2.18
Recessed depth under BA13 (mm)	20
Cable length	-
Product color	White
IK Code	IK04
Incandescent wire test	650°C
IP Code	IP20
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes
Recoverable	Insulation material except driver

Liefe time

L80 à 25°	50 000 h
-----------	----------

Supplementary data


Warranty period	5 years
Light beam spread	90°
Tiltable	No
Connection type	Bornier avec repiquage
Linked products	<ul style="list-style-type: none">• BL08000013 - TF066-Protrusion frame 600x600• BL08000002 - TF018 Mechanically welded projection frame• BL08000009 - INTEGRATION FRAME 600x600




FILE UPDATED ON 26/01/2023




Light distribution

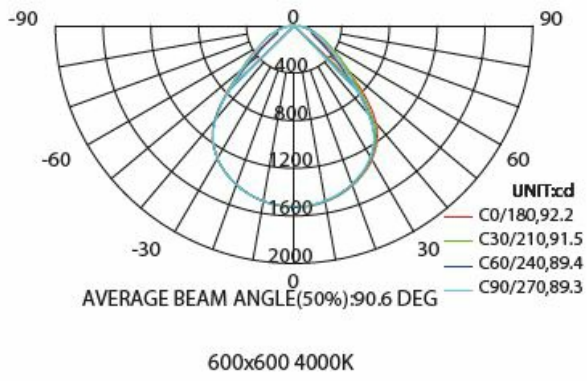

Photometric curves

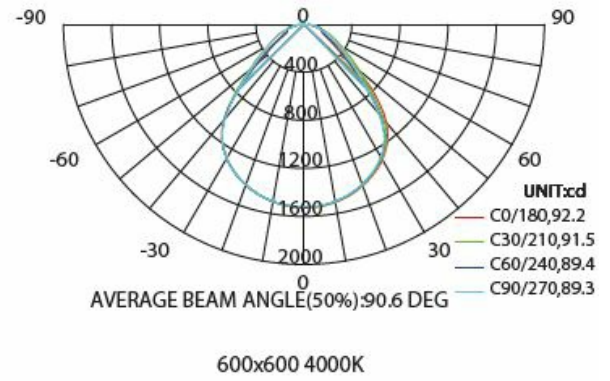

Other

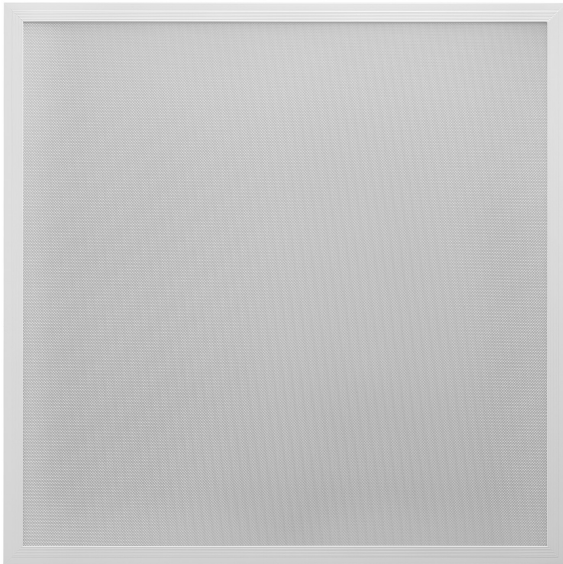

FILE UPDATED ON 26/01/2023

