

PROJECTOR

ARCHI-5W-IP65-3000K

BL10066501

OUTDOOR > Outdoor Flood Light

Architectural, design and compact LED projector. UGR19. Anti-glare cap included. It allows the enhancement of architectural elements while being discreet. Its lenses make it possible not to dazzle.

**Application domain**

- Outdoor residential
- Garden
- Outdoor illumination
- Outdoor Circulations
- Entrance Halls
- Outdoor lighting



5 W

400 lm

UGR
<12IRC
>80

IP65

3000K



Electric data

Total power (W)	5
Rated voltage (V)	230V
Distorsion harmonique	<20%
Power factor	>0.9
Network frequencies	50Hz
Electric class	I
Dimmable	No

Power supply data

Max. lamp per B10A circuit breaker	25
Max. lamp per B16A circuit breaker	30
Max. lamp per C16A circuit breaker	40

Photometric data

Color temperatures	3000K
UGR	<12
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>3
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	400lm (3000K)
ULOR	-

Technical data

Dimensions (mm)	75 x 75 x 55
Weight (kg)	0.84
Recessed depth under BA13 (mm)	-
Cable length	20 cm
Product color	Dark gray
IK Code	IK07
Incandescent wire test	650°C
IP Code	IP65
Use temperature range	-20... +40°
Body material	Aluminium
Diffuser material	Verre trempé
Driver included	Yes


Liefe time

L70 à 25°	50 000 h
-----------	----------

Supplementary data

Warranty period	5 years
Light beam spread	30°
Tiltable	Yes (120°)

Plan

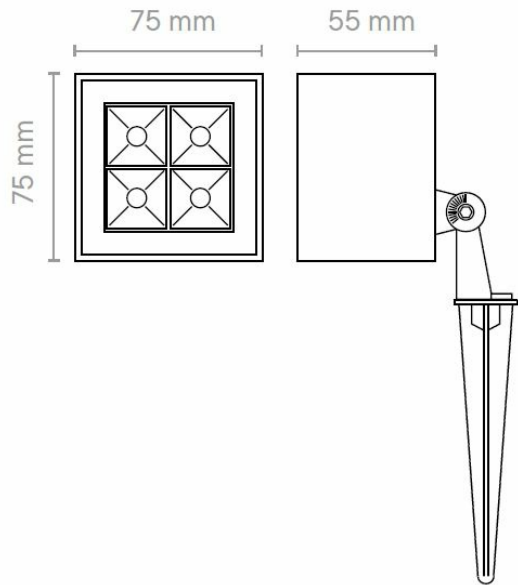

Other



Other



Other

