

WATERPROOF EASY CCT

# ETANCHE LED EASY CCT-120-36W-IP65-TRAV BL11356507

**INDOOR** > Triproof

Waterproof LED luminaire, through-hole, IP65, IK08, 850°. Quick connection terminal blocks without tools, temperature color change on the product. Phillips driver. Adapt the right light color on site together with your customer!



## Application domain

- Industrial facilities
- Parkings lots and underground passages
- Garages
- Production areas, assembly plant
- Storage



35 W

4240  
lm

IRC  
>83

IP65

3 CCT

3000K / 4000K  
6000K



## Electric data

|                       |      |
|-----------------------|------|
| Total power (W)       | 35   |
| Rated voltage (V)     | 230V |
| Distorsion harmonique | -    |
| Power factor          | >0.9 |
| Network frequencies   | 50Hz |
| Electric class        | I    |
| Dimmable              | No   |

## Photometric data

|                            |                       |
|----------------------------|-----------------------|
| Color temperatures         | 3000K / 4000K / 6000K |
| Light source type          | SMD                   |
| Including the light source | Yes                   |
| SDCM                       | SDCM>5                |
| IRC                        | >83                   |
| Safety group (EN62778)     | RG0                   |
| Luminous flux (lm)         | 4240lm (4000K)        |
| ULOR                       | -                     |

## Technical data

|                                |                |
|--------------------------------|----------------|
| Dimensions (mm)                | 1230 x 59 x 60 |
| Weight (kg)                    | 0.92           |
| Recessed depth under BA13 (mm) | -              |
| Cable length                   | -              |
| Product color                  | Grey           |
| IK Code                        | IK08           |
| Incandescent wire test         | 850°C          |
| IP Code                        | IP65           |
| Use temperature range          | -25... +40°    |
| Body material                  | PC             |
| Diffuser material              | PC             |
| Driver included                | Yes            |


## Liefe time

|           |          |
|-----------|----------|
| L80 à 25° | 50 000 h |
|-----------|----------|

## Supplementary data

|                   |                                  |
|-------------------|----------------------------------|
| Warranty period   | 5 years                          |
| Light beam spread | 120°                             |
| Tiltable          | No                               |
| Connection type   | Connecteur rapide avec repiquage |

## Photometric curves

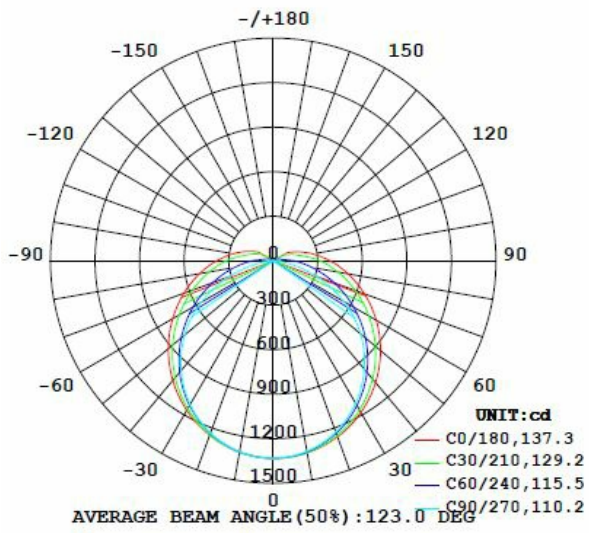

## Other



## Other

