TOP LED NORDIC

in partnership with be-led

LED PORTHOLE

ROUND HUBL ROND-15W-IP44-3CCT-WHITE TR12154405

INDOOR > Indoor Bulkhead
INDOOR > Surface mounted and suspended fixtures
INDOOR > Wall light

To be wall-mounted or ceiling-mounted, the ROUND and SQUARE ranges are in 3 CCTs and offer the possibility of changing the color temperature from warm to cold shades with a simple 3-position switch.

Application domain

- Residential indoor
- Kitchen
- Bedroom
- Home Cellar, House Technical Room

CE | 15 W | 1250 lm | IRC >80 | IP44 | 3 CCT | 3000K / 4000K 5000K | E

FILE UPDATED ON 27/01/2023

be-led

TOPLED NORDIC BE-LED. ALL RIGHTS RESERVED.

Electric data

Total power (W)	15
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.9
Network frequencies	50Hz , 60Hz
Electric class	II
Dimmable	No

Photometric data

Color temperatures	3000K / 4000K / 5000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	1250lm (4000K)
ULOR	-

FILE UPDATED ON 27/01/2023

TOPLED NORDIC BE-LED. ALL RIGHTS RESERVED.

Technical data

Diameter (mm)	220
Height (mm)	53
Recessed diameter (mm)	-
Weight (kg)	0.66
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	White
IK Code	IK08
Incandescent wire test	650°C
IP Code	IP44
Use temperature range	-25... +45°
Body material	PC
Diffuser material	PC
Driver included	Yes
Recoverable	Non concerné

Liefe time

L80 à 25°	35 000 h

Supplementary data

Warranty period	3 years
Light beam spread	120°
Tiltable	No
Connection type	Connecteur rapide avec repiquage
Linked products	• TR12244405 - ROUND CCT 24W IP44

FILE UPDATED ON 27/01/2023

TOPLED NORDIC BE-LED. ALL RIGHTS RESERVED.

Plan

Atmosphere

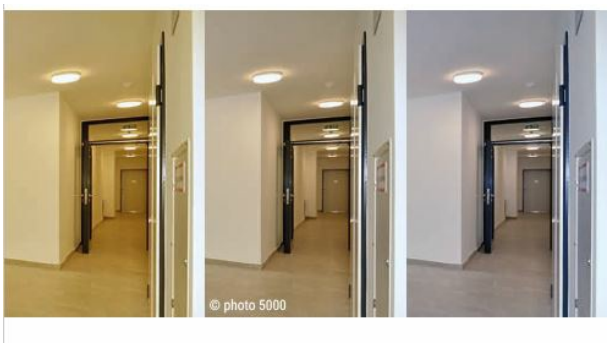

FILE UPDATED ON 27/01/2023

TOPLED NORDIC BE-LED. ALL RIGHTS RESERVED.

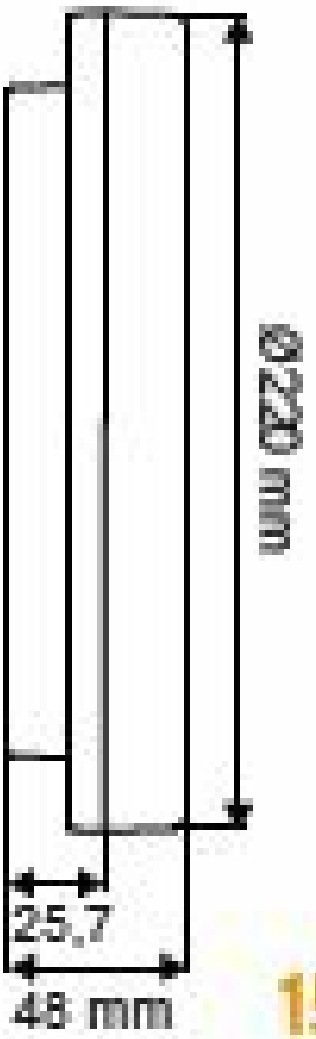

15 W

FILE UPDATED ON 27/01/2023

TOPLED NORDIC BE-LED. ALL RIGHTS RESERVED.