


LINE

LINE 25W-3000K-36°-DIM-BL

BL02252001

INDOOR > Downlights (until 95 mm)

Recessed architectural led, gives depth to volumes. Low glare UGR<19, white with chrome reflector. Appreciated by decorators for its design, it does not dazzle and brings a real contemporary touch.



Application domain

- Residential indoor
- Kitchen
- Bedroom
- Home Office
- House Corridor
- Entrance Halls
- Shop



25 W

1500
lm

UGR
<19

IRC
>90

IP40

3000K



FILE UPDATED ON 15/02/2023

Electric data

Total power (W)	25
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.9
Network frequencies	50Hz
Electric class	II
Dimmable	Triac

Photometric data

Color temperatures	3000K
UGR	<19
Light source type	-
Including the light source	Yes
SDCM	SDCM>4
IRC	>90
Safety group (EN62778)	RG1
Luminous flux (lm)	1500lm (3000K)
ULOR	-



FILE UPDATED ON 15/02/2023



Technical data

Dimensions (mm)	280 x 45 x 51
Recessed diameter (mm)	Min. : 37 Max. : 272
Weight (kg)	0.56
Recessed depth under BA13 (mm)	60
Cable length	-
Product color	White
IK Code	IK06
Incandescent wire test	650°C
IP Code	IP40
Use temperature range	-25... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes
Recoverable	Non recouvrable

Liefe time

L70 à 25°	50 000 h
-----------	----------

Supplementary data

Warranty period	3 years
Light beam spread	36°
Tiltable	No
Connection type	Connector on the product




FILE UPDATED ON 15/02/2023



Atmosphere



Atmosphere

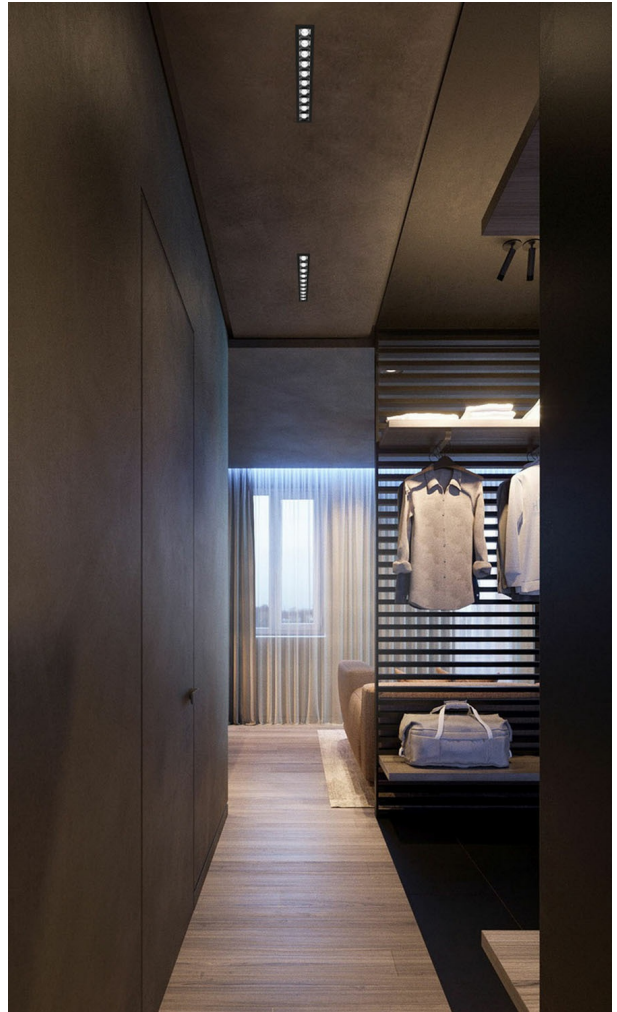

Other



FILE UPDATED ON 15/02/2023