

EYE

## EYE-ENC-MURAL-3W-3000K-IP20

BL16032001

**INDOOR** > Downlights (until 95 mm)

Eye LED module for recessing into walls indoors. Allows you to mark out and highlight passageways: stairs, corridors. Finishing accessory to be ordered separately, round or square, white or black.



### Application domain

- Residential indoor
- Bedroom
- House Corridor
- Circulations areas
- Stairs



3 W

65 lm

IRC  
>90IP54  
facade

3000K

G

FILE UPDATED ON 12/04/2023

## Electric data

|                       |       |
|-----------------------|-------|
| Total power (W)       | 3     |
| Rated voltage (V)     | 230V  |
| Distorsion harmonique | <35%  |
| Power factor          | >0.95 |
| Network frequencies   | 50Hz  |
| Electric class        | II    |
| Dimmable              | Triac |

## Photometric data

|                            |              |
|----------------------------|--------------|
| Color temperatures         | 3000K        |
| Light source type          | COB          |
| Including the light source | Yes          |
| SDCM                       | SDCM>4       |
| IRC                        | >90          |
| Safety group (EN62778)     | RG0          |
| Luminous flux (lm)         | 65lm (3000K) |
| ULOR                       | -            |



FILE UPDATED ON 12/04/2023



## Technical data

|                                |                       |
|--------------------------------|-----------------------|
| Diameter (mm)                  | 50                    |
| Height (mm)                    | 35                    |
| Recessed diameter (mm)         | Min. : 43   Max. : 46 |
| Weight (kg)                    | 0.1                   |
| Recessed depth under BA13 (mm) | 35                    |
| Cable length                   | 20 cm                 |
| Product color                  | White                 |
| IK Code                        | IK06                  |
| Incandescent wire test         | 650°C                 |
| IP Code                        | IP54 facade           |
| Use temperature range          | -20... +45°           |
| Body material                  | Aluminium             |
| Diffuser material              | PC                    |
| Driver included                | Yes                   |
| Recoverable                    | Non recouvrable       |

## Liefe time

|           |          |
|-----------|----------|
| L70 à 25° | 50 000 h |
|-----------|----------|




FILE UPDATED ON 12/04/2023



## Supplementary data

|                   |   |
|-------------------|---|
| Warranty period   | 5 years   |
| Light beam spread | 60°   |
| Tiltable          | No  |
| Connection type   | Fil à connecter   |
| Linked products   | <ul style="list-style-type: none"><li>• BL16000001 - EYE-ACC-ROUND-WHITE</li><li>• BL16000002 - EYE-ACC-ROUND BLACK</li><li>• BL16000003 - EYE-ACC-SQUARE-WHITE</li><li>• BL16000004 - EYE-ACC-SQUARE-BLACK</li></ul> |

## Accessories

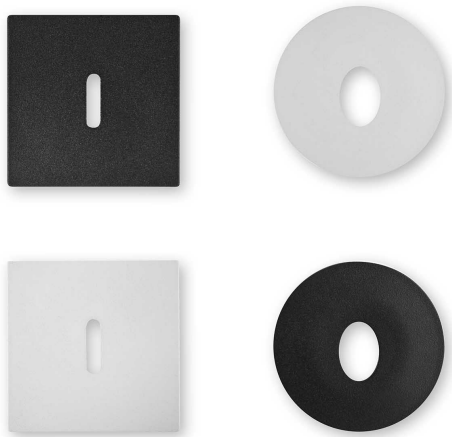

FILE UPDATED ON 12/04/2023