

# TF156-SQUARE LIGHT-300X300-15W-2CCT-DALI-WHITE

BL02152002

**INDOOR** > Surface mounted and suspended fixtures

To be surface-mounted, ideal for architectural projects! Possible temperature change on the product. Thanks to its Dali Push Dim power supply, adapt the level of lighting to the work environment.



## Application domain

- Meeting room
- School
- Office
- Entrance Halls



## Electric data

Total power (W)	15
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.95
Network frequencies	50Hz
Electric class	I
Dimmable	Dali , push dim

## Photometric data

Color temperatures	3000K / 4000K
UGR	<19
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	1500lm (3000K)
ULOR	-

## Technical data

Dimensions (mm)	300 x 300 x 80
Weight (kg)	2.66
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	White
IK Code	IK04
Incandescent wire test	650°C
IP Code	IP20
Use temperature range	-20... +45°
Body material	Aluminium
Diffuser material	-
Driver included	Yes


## Liefe time

L90 à 25°	50 000 h
-----------	----------


## Supplementary data

Warranty period	5 years
Light beam spread	90°
Tiltable	No
Connection type	Fil à connecter
Linked products	<ul style="list-style-type: none"><li>• BL02000002 - MOON SQUARE WHITE SUSP KIT</li></ul>

## Plan

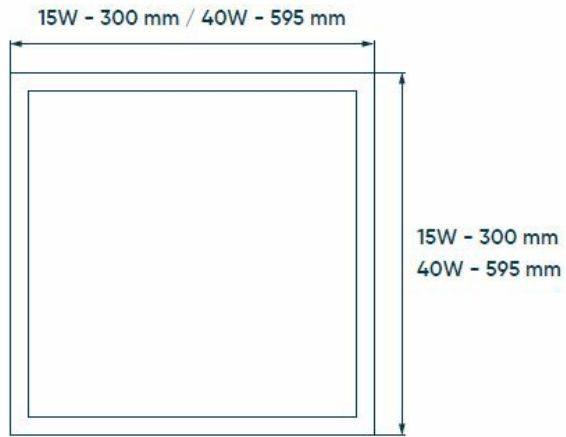

## Photometric curves

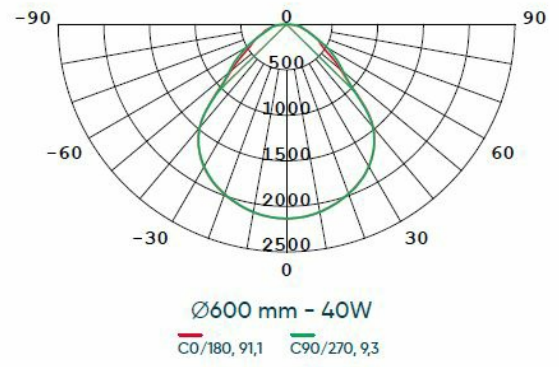

## Other

