

WATERPROOF EASY CCT

ETANCHE LED EASY CCT-150-50W-IP65-TRAV BL11506507

INDOOR > Triproof

Led waterproof strip, crossing, IP65, IK08, 850°. Quick connection terminal block without tools, temperature color change on the product. Phillips driver. Match the right color on site with your customer!



Application domain

- Industrial facilities
- Parkings lots and underground passages
- Garages
- Production areas, assembly plant
- Storage



50 W	6020 lm	IRC >83	IP65	3 CCT	3000K / 4000K 6000K	
------	------------	------------	------	-------	------------------------	---

Electric data

Total power (W)	50
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.9
Network frequencies	50Hz
Electric class	I
Dimmable	No

Photometric data

Color temperatures	3000K / 4000K / 6000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>5
IRC	>83
Safety group (EN62778)	RG0
Luminous flux (lm)	6020lm (4000K)
ULOR	-

Technical data

Dimensions (mm)	1520 x 59 x 60
Weight (kg)	1.06
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	Grey
IK Code	IK08
Incandescent wire test	850°C
IP Code	IP65
Use temperature range	-25... +40°
Body material	PC
Diffuser material	PC
Driver included	Yes


Liefe time

L80 à 25°	50 000 h
-----------	----------

Supplementary data

Warranty period	5 years
Light beam spread	120°
Tiltable	No
Connection type	Connecteur rapide avec repiquage

Photometric curves

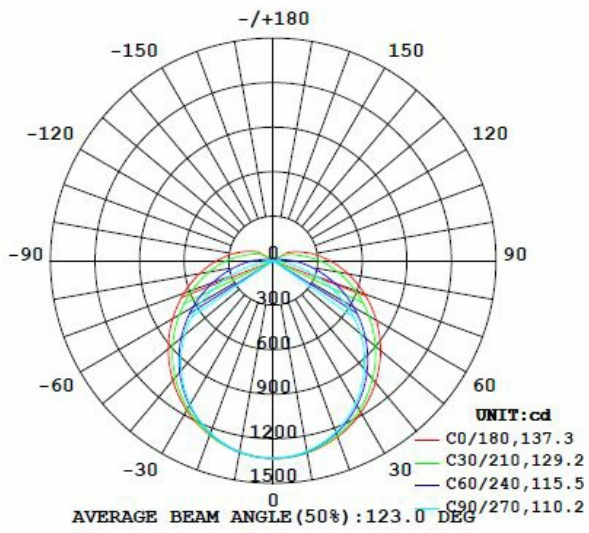

Other



Other

