

LANTERN

TF130-LANTERNE ASY 60W-3000K-IP65

BL10606504

OUTDOOR > Street Lighting

OUTDOOR > Outdoor Flood Light

60W lantern with an asymmetrical distribution 156° x 71° ideal for parking spaces, private paths, access roads... End piece diameter 60 mm.



Application domain

- Outdoor Parking
- Outdoor lighting



Electric data

Total power (W)	60
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.95
Network frequencies	50Hz
Electric class	I
Dimmable	No



FILE UPDATED ON 27/04/2023

Photometric data

Color temperatures	3000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG1
Luminous flux (lm)	8400lm (3000K)
ULOR	-

Technical data

Dimensions (mm)	593 x 255 x 133
Weight (kg)	5.2
Recessed depth under BA13 (mm)	-
Cable length	50 cm
Product color	Gray RAL 7035
IK Code	IK08
Incandescent wire test	650°C
IP Code	IP66
Use temperature range	-20... +50°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes

Liefe time

L80 à 25°	50 000 h
-----------	----------




FILE UPDATED ON 27/04/2023




Supplementary data

Warranty period	5 years
Light beam spread	156° X 71°
Tiltable	No
Connection type	Fil à connecter
Linked products	<ul style="list-style-type: none">BL10306504 - TF129 ASY LANTERN 30W 3000K

Light distribution

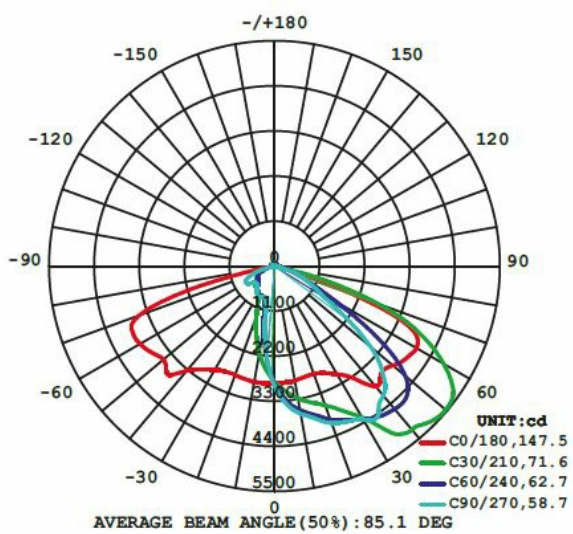


Atmosphere

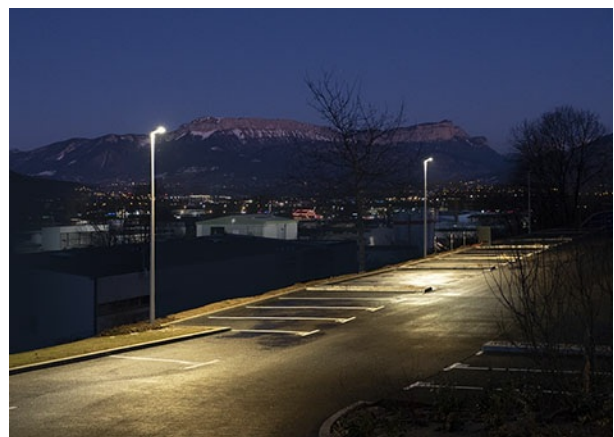

FILE UPDATED ON 27/04/2023



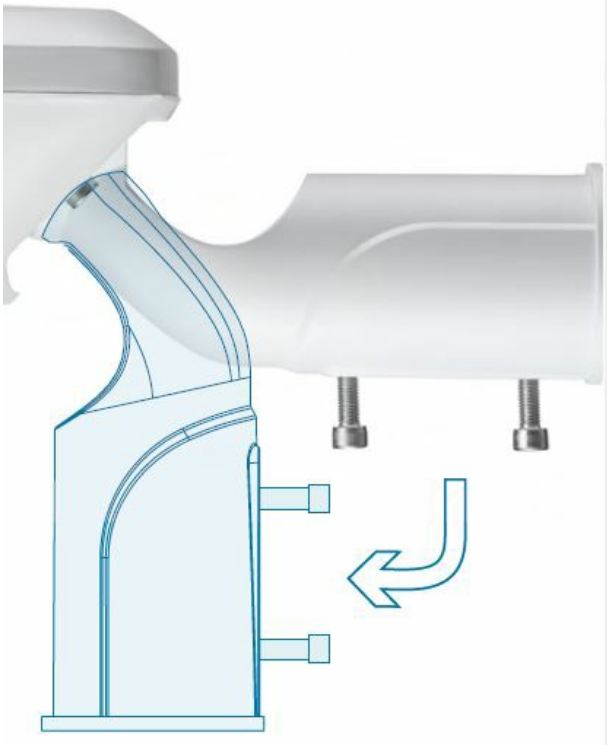

FILE UPDATED ON 27/04/2023

