

WALL

# WALL SQUARE RECESSED-4W-IP65-3000K-GRIS FONCE

PL16046502

**OUTDOOR** > Outdoor Wall Light

Square wall-mounted aluminum recessed light for outdoor beaconing.



## Application domain

- Outdoor residential
- Garden
- Outdoor illumination
- Outdoor Circulations
- Outdoor lighting



## Electric data

Total power (W)	4
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.9
Network frequencies	50Hz
Electric class	I
Dimmable	No

## Photometric data

Color temperatures	3000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>4
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	220lm (3000K)
ULOR	-

## Technical data

Dimensions (mm)	115 x 115 x 37
Recessed diameter (mm)	109
Weight (kg)	0.36
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	Dark gray
IK Code	IK08
Incandescent wire test	650°C
IP Code	IP65
Use temperature range	-25... +45°
Body material	Aluminium
Diffuser material	PC
Driver included	Yes


## Liefe time

L80 à 25°	35 000 h
-----------	----------

## Supplementary data

Warranty period	5 years
Light beam spread	60°
Tiltable	No
Connection type	Bornier avec repiquage

## Plan

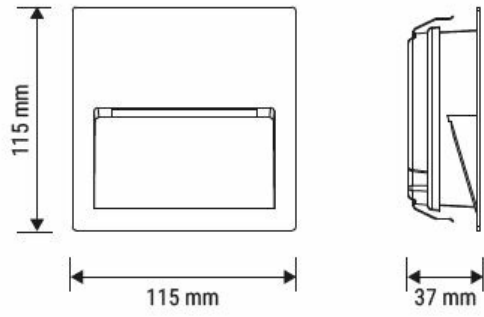

## Accessories

