

BATTEN

# TF045-BATTEN 120-36W-IP65-4000K-OPAL-PC

BL11366510

**INDOOR** > Triproof

Neonflex LED Waterproof strip for technical rooms or construction sites, garages, cellars, technical circulations. Quick connector, non-through.



## Application domain

- Garages
- Cloakrooms
- Locaux techniques



36 W

3600  
lmIRC  
>80

IP65

4000K

F



FILE UPDATED ON 07/12/2022

## Electric data

Total power (W)	36
Rated voltage (V)	230V
Distorsion harmonique	-
Power factor	>0.9
Network frequencies	50Hz
Electric class	II
Dimmable	No

## Photometric data

Color temperatures	4000K
Light source type	SMD
Including the light source	Yes
SDCM	SDCM>6
IRC	>80
Safety group (EN62778)	RG0
Luminous flux (lm)	3600lm (4000K)
ULOR	-



FILE UPDATED ON 07/12/2022



## Technical data

Dimensions (mm)	1230 x 53 x 35
Weight (kg)	0.34
Recessed depth under BA13 (mm)	-
Cable length	-
Product color	Grey
IK Code	IK08
Incandescent wire test	650°C
IP Code	IP65
Use temperature range	-20... +40°
Body material	PC
Diffuser material	PC
Driver included	Yes

## Liefe time

L70 à 25°	30 000 h
-----------	----------

## Supplementary data

Warranty period	2 years
Light beam spread	120°
Tiltable	No




FILE UPDATED ON 07/12/2022



## Photometric curves

---

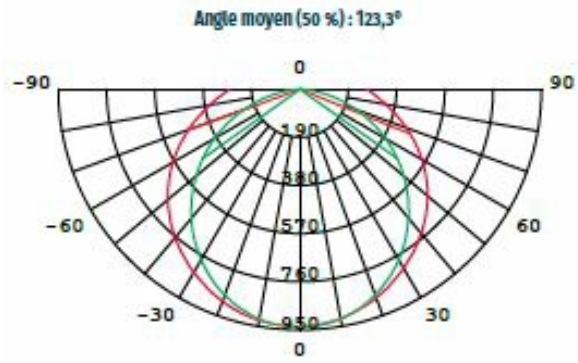

## Other

---



## Other

---



FILE UPDATED ON 07/12/2022

